


ALL REQUIRED OPENINGS ARE PROVIDED IN THE SHEET METAL PACKAGE SHELF. THE INSULATION MATERIAL BETWEEN THE METAL SHELF PANEL AND SHELF TRIM IS SLOTTED AT THE AIR INLET AND OUTLET HOLES FOR EASE OF REMOVAL. REMOVE THE INSULATION AT THE INLET AND OUTLET HOLES. DO NOT CUT THE SHELF TRIM AT THE AIR INLET HOLE.

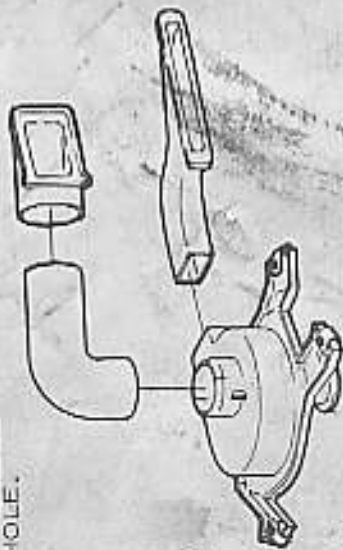

SCREW #8-18 x 1 1/2 - 2 REQ'D.


DRILL 1/8 DIA. HOLE FOR #8-18 x 1 1/2 SCREW

SCREW 1/4 - 14 x 1.00 8 REQ'D.

IN SEAT TIER AND FOUNDATION PROVIDE CLEARANCE FOR MOTOR AS REQUIRED.

VIEW B

BOLT AND CLIP ASS'Y. 4 REQ'D.

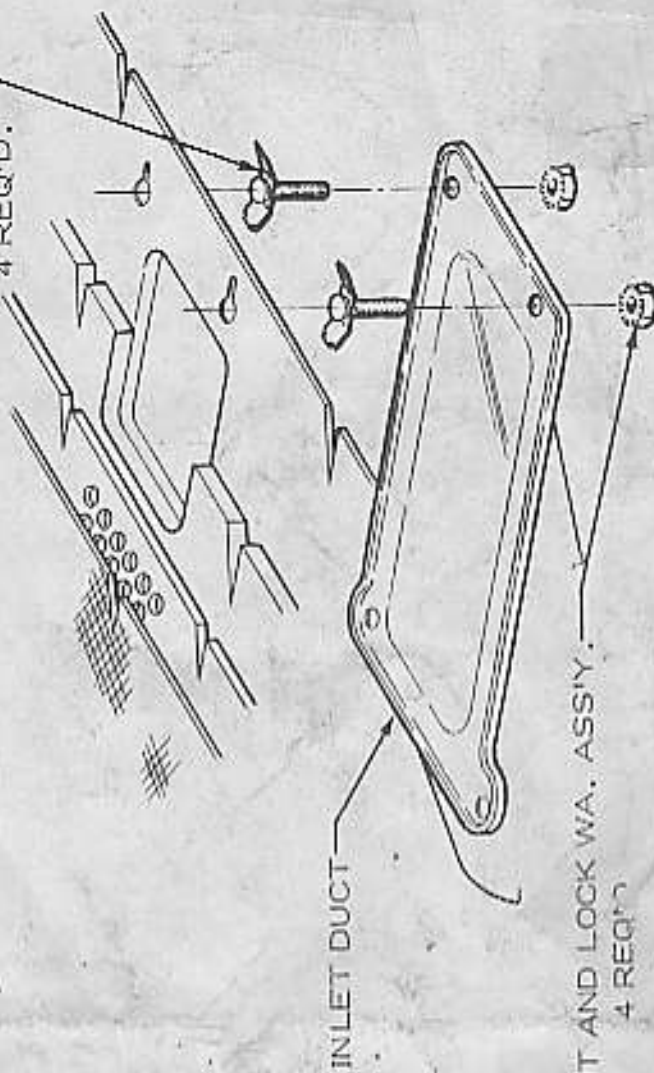

USING ELONGATED HOLES IN METAL SHELF AS A GUIDE DRILL ELONGATED STUD HOLES IN SHELF TRIM. ALIGN TEMPLATE ON TOP OF SHELF PANEL USING DRILLED HOLES TO LOCATE AND CAREFULLY CUT SHELF TRIM.

NUT AND LOCK WA. ASS'Y. 4 REQ'D.

NUT AND LOCK WA. ASS'Y. 1/4 - 20 2 REQ'D.

PAINT OUTLET GRILLE TO MATCH INTERIOR TRIM COLOR

CHECK SYSTEM FOR PROPER OPERATION REINSTALL PREVIOUSLY REMOVED TRIM AND SEAT.

SPARE TIRE STOP